


CBL100 Concealed frame for wallhung bidet 91710.0

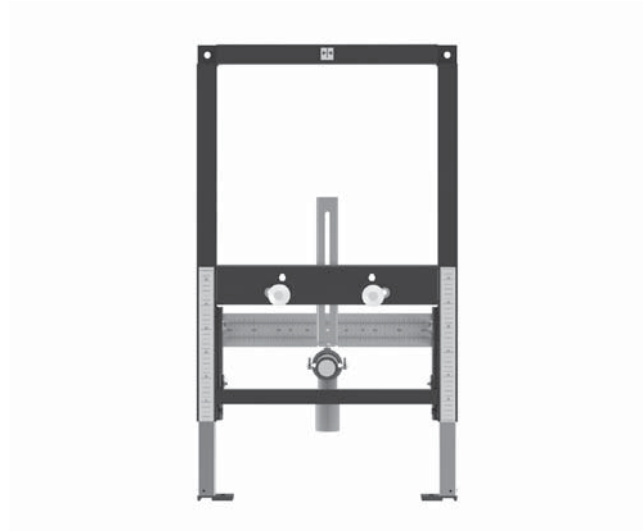

TECHNICAL DATA

Order no.	91710.0
matching for	All LAUFEN wallhung bidets
Specifications	Self-supporting steel frame for covering with plasterboard, installation onto a solid wall, in drywall constructions.
Other specifications	Galvanized leg supports, rotatable, height-adjustable 0-200 mm. Capable to resist 400 kg
Water connection	The axial distance is adjustable between 80-360 mm, the height adjustable between 65-270 mm.
Installation depth	135-205 mm
Weight	10,65 kg

Mounting acc. incl.	Fastening set to floor, fastening set for ceramic and protection tubes for M12 threaded rods and outlet bend.
Mounting acc. excl.	Fastening set for wall, order no. 89563.5 Sound insulation set, order no. 89269.6
Mounting information	Height from finished floor to top of bidet pre-set to 400 mm, adjustable between 390-450 mm.
Colours	Surface powder coated blue

TECHNICAL DRAWINGS / S 1 : 20

